



# HYDRAULIC LOAD STABILIZER CM 20 STRFF

## Hydraulic load stabilizer for bins and cases

It can be applied to all telehandlers, front loaders and forklift trucks. It allows the blocking and stabilization of the load to carry out safely all the handling and warehousing operations.


- 2000 kg capacity
- FEM/ EURO linkage
- FEM forks and carriage
- Hydraulic connecting hoses

Available in the versions:

- One central cylinder (850/1100)
- Two hiding lateral cylinders (1150)
- Two central cylinders and extralifting (1700)
- With lateral FEM side shift (TR)

Optional accessories:

Bin holder, case holder, pliable FEM forks.

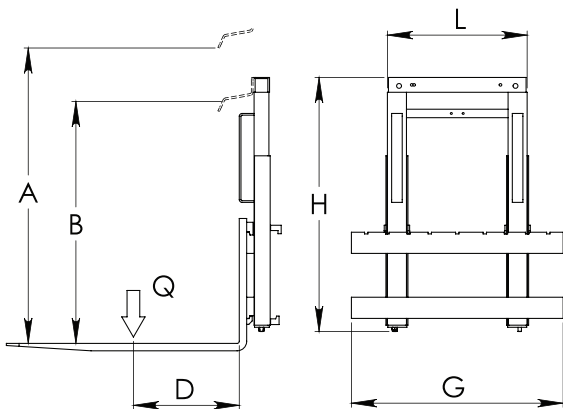

Version	BIN HOLDER			CASE HOLDER			L mm	H mm	G mm	D mm	P kg	TR	F
	Q kg	B mm	A mm	B mm	A mm								
850	2000	1160	1950	1100	1900	660	1200	240 ÷ 1200	500	225	-	1	
1100	2000	1460	2500	1400	2450	660	1500	240 ÷ 1200	500	232	-	1	
1150	2000	1460	2550	1400	2500	660	1500	240 ÷ 1200	500	250	-	1	
1700	2000	1100	2740	1050	2700	660	1150	240 ÷ 1200	500	252	-	1	
850 TR	2000	1160	1950	1100	1900	660	1200	240 ÷ 1200	500	300	100 + 100	2	
1100 TR	2000	1460	2500	1400	2450	660	1500	240 ÷ 1200	500	307	100 + 100	2	
1150 TR	2000	1460	2550	1400	2500	660	1500	240 ÷ 1200	500	325	100 + 100	2	
1700 TR	2000	1100	2740	1050	2700	660	1150	240 ÷ 1200	500	327	100 + 100	2	

**LEGEND:** (B) Minimum opening - (A) Maximum opening - (L) Frame width - (H) Overall dimensions - (G) Width with forks  
(D) Barycentre of the load - (P) Weight - (TR) Side shift - (F) Required hydraulic functions